




## AD3002 Two Channel Digital Power Amplifier

### Features:

*MAIN / INTERRUPT priority input switching*  
*Auxiliary line output*  
*Speaker A/B switching*  
*Front panel Level and Balance Trim controls*  
*Independent rear mounted Main Level controls*  
*High Level inputs*  
*Digital Optical line input (PCM 2 Channel Decoding)*  
*Multi-function IR remote control*  
*Signal sensing "Power On" and Trigger mode*  
*Rear mounted treble and bass controls*  
*Rack mountable (rack ears included)*

### Specifications:

Stereo (8 ohm):	150W per channel, <.2% THD+N
Stereo (4 ohm):	275W per channel, <.2% THD+N
Bridged Mono (8 ohm):	600W, 1kHz, <.2% THD+N
Frequency Response:	20Hz ~ 20kHz
Signal to Noise Ratio:	-100dB referenced to .2% THD+N @ 8 ohms w/20kHz Lowpass filter
Channel Separation:	60dB
Input Sensitivity:	Variable, 350mV to 2.8V for rated power into 8 ohms
Bass/Treble Control:	+/- 12dB @ 100Hz and 10kHz
AC Power Consumption:	750W maximum
Net Weight:	8lbs / 3.6kgs
Gross Weight:	12.3lbs / 5.6kgs

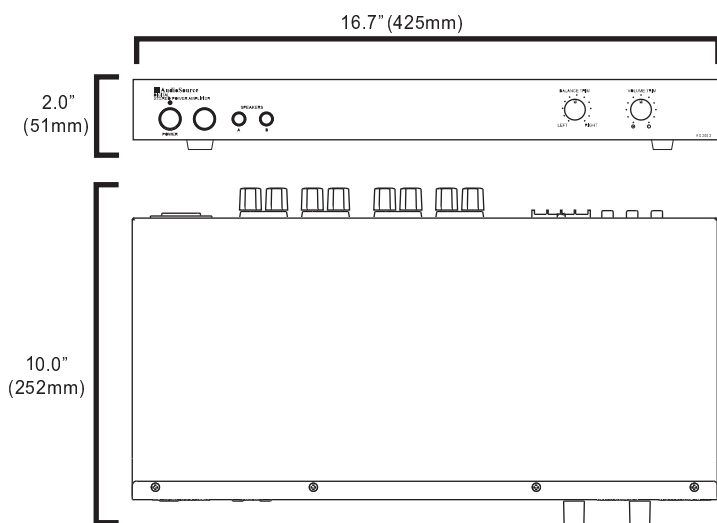

AD3002  
AudioSource 2 x 150 Watt Digital Amplifier

MSRP : \$729.99      MAP : \$579.99      UPC: 041087906588      MP: 1  
Shipping Carton Weight / Dimensions lbs-in: 12.3lbs - 20" x 13.5" x 5.5"      kg-mm: 5.6 - 508 x 343 x 140



www.audiosource.net  
13970 SW 72nd Ave Portland  
OR 97223 Tel: 503.914.4688