



Two Channel Digital Power Amplifier

Features:

MAIN / INTERRUPT priority input switching

Auxiliary line output

Speaker A/B switching

Front panel Level and Balance Trim controls

Independent rear mounted Main Level controls

High Level inputs


Digital Optical line input (PCM 2 Channel Decoding)

Multi-function IR remote control

Signal sensing "Power On" and Trigger mode

Rear mounted treble and bass controls

Rack mountable (rack ears included)

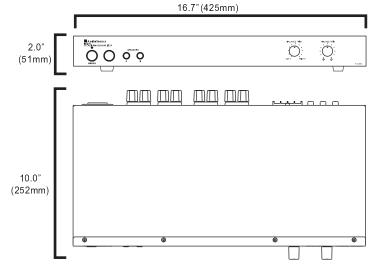

Specifications:

Stereo (8 ohm): 100W per channel, <.2% THD+N

Stereo (4 ohm): 225W per channel, <.2% THD+N

Bridged Mono (8 ohm): 450W, 1kHz, <.2% THD+N

Frequency Response: 20Hz ~ 20kHz

Signal to Noise Ratio: -100dBr referenced to .2% THD+N @ 8 ohms

w/20kHz Lowpass filter

Channel Separation: 60dB

Input Sensitivity: Variable, 350mV to 2.8V for rated power

into 8 ohms

Bass/Treble Control: +/- 12dB @ 100Hz and 10kHz

AC Power Consumption: 550W maximum

Net Weight: 7.5lbs / 3.4kgs

Gross Weight: 12.2lbs / 5.5kgs

